FIND IT WITH SENSIT®HXG-2d

Combustible Gas Detector



The first affordable gas leak detector with TRUE digital display because "how much" counts.





NO MORE GUESS WORK -

"How big is the leak?"

- Direct PPM readout
- Direct "LEL" percent readout

FIND LEAKS QUICKLY

- New "Patent Pending" electronic tick control
- Ideal for Natural, Propane and Butane gas leaks

SAFE, DURABLE and RELIABLE

- Intrinsically safe design
- SENSIT "ruggedized" design



SPECIFICATIONS

PHYSICAL

Size: 3.5 x 10 x 1.6" (8.9 x 25 x 4 cm)

Weight: 1.3 lbs. (0.59kg) Construction: High impact ABS

Battery Power: 3 "C" alkaline batteries or

3 "C" rechargeable NiCad batteries

(Recharge time ~4 hours)

Battery Life: Alkaline - 50 hours of operation

Rechargeable - 20 hours of operation

Gooseneck: 16" reach (41 cm)

SENSOR

Type: Solid State Sensitivity: To 10ppm

Response Time: Less than 1 second Alarm Set: 0.5% methane (10% LEL)



(Europe)

CE IIB T3
IP20

(USA)

Class 1, Zone 2, AEx nL IIB T3

(Canada)

Class1, Zone 2, Ex nL IIB T3

PARTIAL LIST OF GASES SENSED

Methane Natural Gas
Ammonia Hydrogen
Butane Propane
Acetone Gasoline
Halon Jet Fuel

Refrigerants Ethylene Oxide Lacquer Thinner Industrial Solvents

Alcohol

PARTIAL LIST OF INDUSTRIES

Utility Companies
Gas Processing Plants
Propane Marketers
Safety Engineers
Fire and Police
Emergency Vehicles
Appliance Repair
Plant Maintenance
Plumbing Contractors


Furnace Heat Exchanger Testing

Marine Operations

Heating and Air Conditioning

Municipalities

Mobile Home Parks
Apartment Buildings

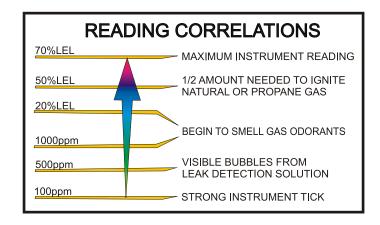

The Sensit®HXG-2d cannot be used to check for carbon monoxide (CO) leakage.



SENSIT TECHNOLOGIES

851 Transport Drive • Valparaiso, IN 46383-8432 Phone: (888) 4SENSIT • (219) 465-2700 Fax: (219) 465-2701 • www.gasleaksensors.com

 Represented by 	